

G80 Alloy Load Chains

T8 Class high-intensity chain, broken off


intensity=800mpa

GBJ802-86 standard short link chain

4 times of safety factor, 2.5 times of test load

high quality alloy steel

Surface treatment: black or as per your request

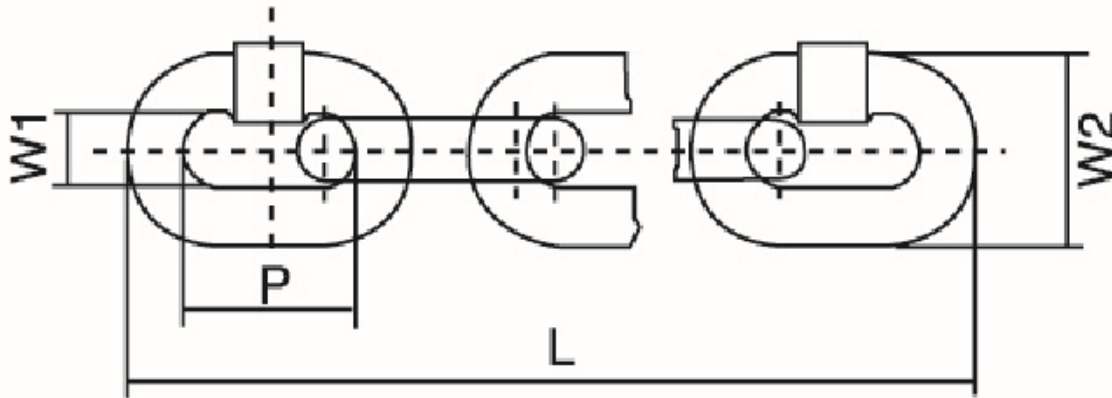

Specifications

Size d*p (mm)	Width (mm)		WLL (t)	MPF min. kN	BF min. Kn	N.W. (kg/m)
	Inside min. W1	Outside W2				
4×12	5	13	0.5	12	20.2	0.28
5×15	6.25	17	0.8	19	31.6	0.35
6×18	7.5	20	1.1	27	45.4	0.79
6.3×19	7.88	21	1.25	30	50	0.8
7×21	8.75	23	1.5	37	61.6	1
8×24	10	26	2	48	80.6	1.4
9×27	11.25	30	2.5	61	102	1.8
10×30	12.5	33	3.2	76	126	2.2
13×39	16.25	43	5.4	128	214	3.8
16×48	20.8	59.2	8	201	322	5.7
18×54	23.4	66.6	10	254	407	7.3
20×60	26	74	12.5	314	503	9
22×66	28.6	81.4	15	380	608	10.9
26×78	33.8	96.2	21.2	531	849	15.2
32×96	41.6	118	31.5	804	1290	23