


Wire Rope Slings

0.31Ton-115.31Ton

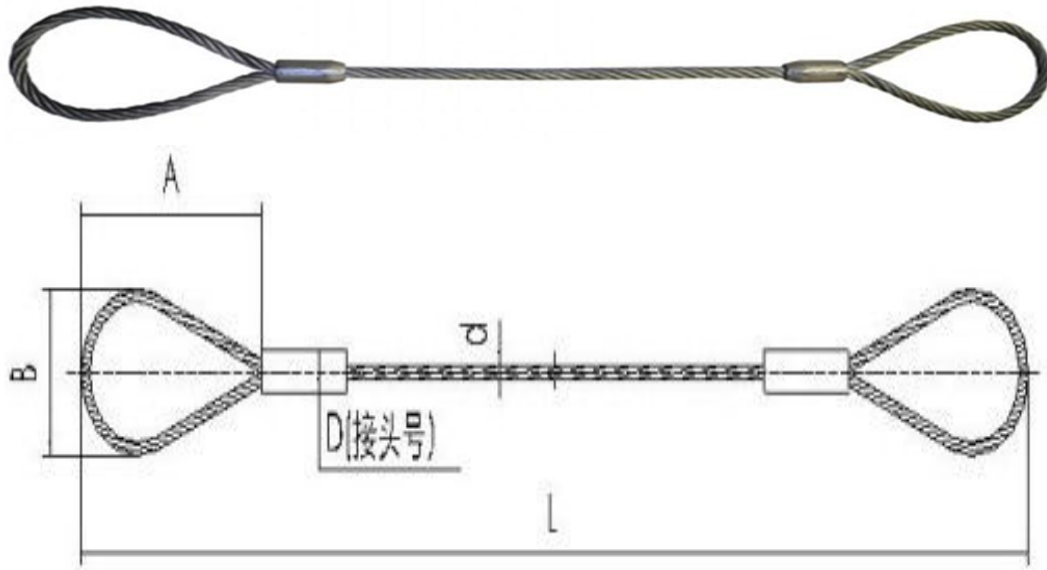

Specifications

Nominal Diameter	1570 N/mm ²		1670 N/mm ²		1770 N/mm ²	
	MBL (t)	SWL (t)	MBL (t)	SWL (t)	MBL (t)	SWL (t)
6	/	/	/	/	2	0.33
9	3.63	0.31	3.87	0.64	4.1	0.68
10	4.48	0.75	4.77	0.8	5.06	0.84
12	6.46	1.08	6.87	1.15	7.28	1.12
14	8.79	1.47	9.35	1.56	9.91	1.65
16	11.48	1.91	12.21	2.04	12.95	2.16
18	14.53	2.42	15.46	2.58	16.39	2.73
20	17.94	2.99	19.08	3.18	20.22	3.27
22	21.71	3.62	23.09	3.85	24.48	4.08
24	25.84	4.31	27.48	4.58	29.13	4.86
26	30.33	5.05	32.26	5.38	34.18	5.7
28	35.16	5.86	37.41	6.23	39.65	6.61
30	40.37	6.73	42.94	7.16	45.51	7.59
32	45.4	7.57	48.37	8.06	51.43	8.57
36	57.34	9.56	61.22	10.2	65.1	10.85
40	70.72	11.78	75.62	12.6	80.41	13.4
44	85.62	14.27	91.43	15.24	97.25	16.21
48	101.1	16.85	108.16	18.03	115.31	19.22

Dimensions (mm)

Nominal Diameter	d	D	A	B
6	6	6	160	80
9	9	9	200	100
10	10	10	240	120
12	12	12	240	120
14	14	14	240	120
16	16	16	280	140
18	18	18	320	160
20	20	20	360	180
22	22	22	400	200

24	24	24	440	220
26	26	26	480	240
28	28	28	520	260
30	30	30	560	280
32	32	32	600	300
36	36	36	640	320
40	40	40	680	340
44	44	44	720	360
48	48	48	760	380

1570 N/mm², 1670 N/mm², 1770 N/mm² is minimum breaking load for nominal tensile strength of rope

MBL=Maximal Beyond Load

SWL=Safe Working Load