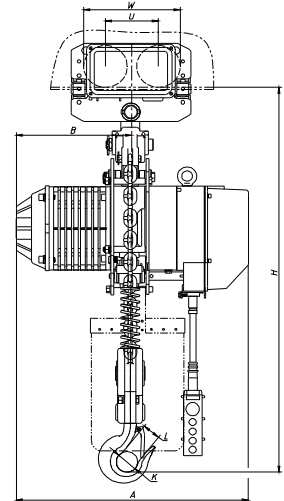
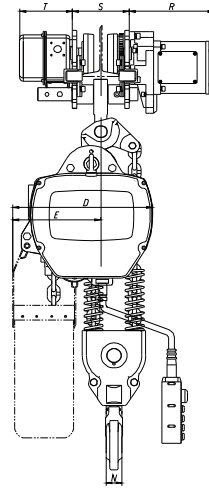


RM Electric Chain Hoists (With Electric Trolley)

0.5Ton-10Ton

Specifications

Type	Capacity (t)	Lifting Speed (m/min)		Standard Lift (m)	Lifting Motor		Traversing Motor			Load Chain Diameter (mm) ×chain falls	Test Load (t)	I - beam (mm)	Weight (kg)	Additional Weight per 1m Lift (kg)	
		50Hz	60Hz		Power (kw)	Rotation Speed (r/min)	Power (kw)	Rotation Speed (r/min)	Traversing Speed (m/min)						
									50Hz	60Hz					
RM00501D	0.5	6.9/2.3	8.3/2.8	3	0.8/0.27	2880/960 (50Hz) 3456/1152 (60Hz)	0.4/0.1	2880/960 (50Hz) 3456/1152 (60Hz)	20/5	24/6	6.3 × 1	0.625	58-153	89	0.8
RM0101D	1	6.8/2.3	8.2/2.8		1.8/0.6		0.4/0.1				7.1 × 1	1.25	58-153	116	1.1
RM0102D	1	3.5/1.2	4.2/1.4		0.8/0.27		0.4/0.1				6.3 × 2	1.25	58-153	101	1.6
RM01501D	1.5	8.9/2.9	10.7/3.5		3.0/1.0		0.4/0.1				10.0 × 1	1.875	82-178	193	2.3
RM0201D	2	6.8/2.3	8.2/2.8		3.0/1.0		0.4/0.1				10.0 × 1	2.5	82-178	199	2.3
RM0202D	2	3.3/1.1	4.0/1.3		1.8/0.6		0.4/0.1				7.1 × 2	2.5	82-178	135	2.2
RM02501D	2.5	5.4/1.8	6.5/2.2		3.0/1.0		0.75/0.18				11.2 × 1	3.125	100-178	209	2.8
RM0301D	3	5.4/1.8	6.5/2.2		3.0/1.0		0.75/0.18				11.2 × 1	3.75	100-178	220	2.8
RM0302D	3	4.5/1.5	5.4/1.8		3.0/1.0		0.75/0.18				10.0 × 2	3.75	100-178	229	4.7
RM0303D	3	2.4/0.8	2.9/1.0		1.8/0.6		0.75/0.18				7.1 × 3	3.75	100-178	163	3.3
RM0502D	5	2.7/0.9	3.2/1.1		3.0/1.0		0.75/0.18				11.2 × 2	6.25	100-178	267	5.6
RM07503D	7.5	1.8/0.6	2.2/0.7		3.0/1.0		0.75/0.18				11.2 × 3	9.4	100-178	408	8.4
RM1004D	10	2.7/0.9	3.2/1.1		3.0×2/1.0×2		0.75/0.18				11.2 × 4	12.5	150-220	520	11.2

Dimensions (mm)

Type	Capacity (t)	Headroom	A	B	D	E	I	K	L	N	W	U	R	T
		H												
RM00501D	0.5	630	545	260	280	160	Φ35	Φ35	25	17	206	111	142	231
RM0101D	1	650	582	280	300	176	Φ40	Φ40	32	24	206	111	142	231
RM0102D	1	695	545	260	280	205	Φ40	Φ40	31	24	206	111	142	231
RM01501D	1.5	770	670	313	430	265	Φ47	Φ47	40	30	237	127	142	231
RM0201D	2	770	670	313	430	265	Φ47	Φ47	40	30	237	127	142	231
RM0202D	2	815	582	280	300	236	Φ36	Φ47	38	30	237	127	142	231
RM02501D	2.5	830	670	313	430	265	Φ58	Φ58	48	36	265	140	142	231
RM0301D	3	830	670	313	430	265	Φ58	Φ58	48	36	265	140	142	231
RM0302D	3	930	670	313	430	320	Φ43	Φ58	47	36	265	140	142	231
RM0303D	3	940	582	280	350	205	Φ43	Φ58	47	36	265	140	142	231
RM0502D	5	1015	670	313	430	325	Φ54	Φ60	48	43	296	156	142	231
RM07503D	7.5	1200	670	313	505	320	Φ54	Φ85	80	55	295	156	142	231
RM1004D	10	1190	685	352	/	890	Φ70	Φ85	80	55	366	191	142	231