


# CARGO LIFT

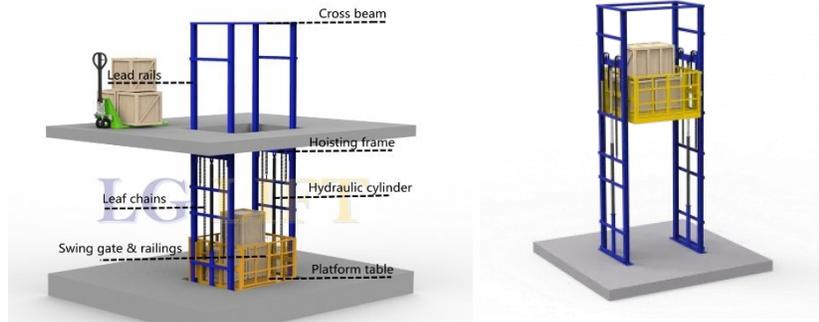

## Application:

- A cargo lift is required to lift bulk items from or to ground floor to first floor of

## Required size and quantity:

- Cargo lift 700KG - 1000KG
- Required quantity: 1 NOS.

## Specifications:

<b>CAPACITY</b>	700KG - 1000KG
<b>PLATFORM SIZE</b>	1500X1500MM
<b>LIFTING HEIGHT</b>	5000MM
<b>PIT WXLXD</b>	1500X1500X300
<b>MOTOR POWER</b>	4KW
<b>POWER SUPPLY V</b>	220/240/380/415

## Standard Features

- Commercial and industrial applications
- 4post designs.
- Standard max. 1000kg loading capacity.
- Upper and lower landing limits
- Upper safety limits
- 24V DC safety control circuits
- Outward opening railings with interlock 1.2M height
- Digital control panel on each landing stop
- Manual lower down valve when power off.
- Explosive-proof valve
- 4-5m/min Lifting speed, down speed adjustable
- 200-250mm minimum pit
- 5-year warranty on main structural components (indoor use)

- **Optional Features**
- Overload warning device
- Fixed access ramp (for pit-less application)
- 2M railing and gate on platform (cabin)
- Motor station protection box
- Semi height on floor or fully caged
- Enclosure wire mesh protections