
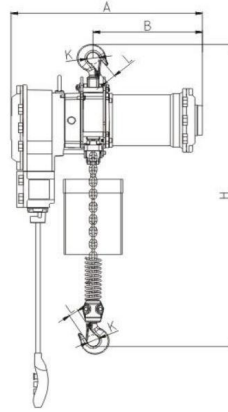


EX Type Electric Chain Hoists (With Hook Suspension)


1Ton-35Ton

Specifications

Type	Capacity (t)	Lifting Speed (m/min)		Standard Lift (m)	Lifting Motor		Load Chain Diameter (mm) ×chain falls	Test Load (t)	Weight (kg)	Additional Weight per 1m Lift (kg)
		50Hz	60Hz		Power (kw)	Rotation Speed (r/min)				
EX0101S	1	6.8	8.2	3	1.5	1440 (50Hz) 1728 (60Hz)	7.1 × 1	1.25	61	1.1
EX0102S	1	3.4	4.1		0.8		6.3 × 2	1.25	52	1.6
EX01501S	1.5	8.8	10.6		3.0		10.0 × 1	1.875	108	2.3
EX0201S	2	6.8	8.2		3.0		10.0 × 1	2.5	115	2.3
EX0202S	2	3.4	4.1		1.5		7.1 × 2	2.5	73	2.2
EX02501S	2.5	5.4	6.5		3.0		11.2 × 1	3.125	116	2.8
EX0301S	3	5.4	6.5		3.0		11.2 × 1	3.75	122	2.8
EX0302S	3	4.4	5.3		3.0		10.0 × 2	3.75	131	4.7
EX0303S	3	2.2	2.6		1.5		7.1 × 3	3.75	85	3.3
EX0502S	5	2.7	3.2		3.0		11.2 × 2	6.25	151	5.6
EX07503S	7.5	1.8	2.2		3.0		11.2 × 3	9.4	266	8.4
EX1004S	10	2.8	3.4		3.0×2		11.2 × 4	12.5	300	11.2
EX1506S	15	1.9	2.2		3.0×2		11.2 × 6	18.75	400	17
EX2008S	20	1.4	1.7		3.0×2		11.2 × 8	25	480	22
EX2510S	25	1.1	1.3		3.0×2		11.2 × 10	31.25	540	28
EX3012S	30	0.9	1.1		3.0×2		11.2 × 12	37.5	1050	34
EX3516S	35	0.7	0.8		3.0×2		11.2 × 16	43.75	1250	45

Dimensions (mm)

Type	Capacity (t)	Headroom H	A	B	D	E	I	J	K	L	M	N
EX0101S	1	600	600	330	300	176	Φ40	31	Φ40	31	24	24
EX0102S	1	670	460	230	280	205	Φ40	31	Φ40	31	24	24
EX01501S	1.5	800	725	350	430	265	Φ49	40	Φ49	40	30	30
EX0201S	2	800	725	350	430	265	Φ49	40	Φ49	40	30	30
EX0202S	2	750	600	330	300	230	Φ59	42	Φ59	42	30	30
EX02501S	2.5	845	675	325	430	320	Φ59	42	Φ59	42	35	35
EX0301S	3	845	675	325	430	320	Φ59	42	Φ59	42	35	35
EX0302S	3	950	675	325	430	320	Φ59	42	Φ58	42	35	35
EX0303S	3	950	580	290	380	205	Φ59	45	Φ59	45	35	35
EX0502S	5	1030	675	325	430	325	Φ60	45	Φ60	45	43	43
EX07503S	7.5	1200	675	325	505	320	Φ85	31	Φ85	80	50	50
EX1004S	10	1400	725	350	890	445	Φ85	80	Φ85	80	50	50
EX1506S	15	1360	725	350	1030	/	Φ110	70	Φ110	80	85	85
EX2008S	20	1250	725	350	1220	/	Φ110	70	Φ110	80	85	85
EX2510S	25	1700	725	350	1315	/	Φ140	80	Φ140	100	95	95
EX3012S	30	1640	915	458	1380	/	Φ140	90	Φ140	100	95	95
EX3516S	35	1790	915	458	1600	/	Φ200	100	Φ200	140	135	135

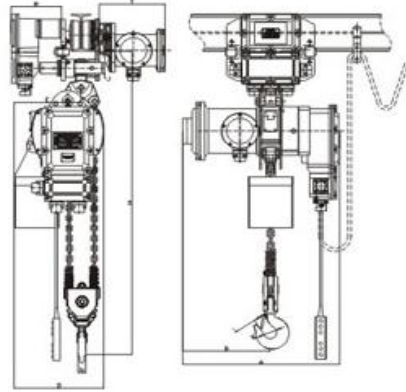EX Type Electric Chain Hoists (With Electric Trolley)

1Ton-35Ton

Specifications

Type	Capacity (t)	Lifting Speed (m/min)		Standard Lift (m)	Lifting Motor		Traversing Motor				Load Chain Diameter (mm) ×chain falls	Test Load (t)	I - beam (mm)	Weight (kg)	Additional Weight per 1m Lift (kg)
		50Hz	60Hz		Power (kw)	Rotation speed (r/min)	Power (kw)	Rotation Speed (r/min)	Traversing Speed (m/min)						
									50Hz	60Hz					
EX0101S	1	6.8	8.2	3	1.5	1440 (50Hz) 1728 (60Hz)	0.4	1440 (50Hz) 1728 (60Hz)	11	13	7.1 × 1	1.25	58-153	103	1.1
EX0102S	1	3.4	4.1		0.8		0.4				6.3 × 2	1.25	58-153	101	1.6
EX01501S	1.5	8.8	10.6		3.0		0.4				10.0 × 1	1.875	82-178	157	2.3
EX0201S	2	6.8	8.2		3.0		0.4				10.0 × 1	2.5	82-178	164	2.3
EX0202S	2	3.4	4.1		1.5		0.4				7.1 × 2	2.5	82-178	122	2.2
EX02501S	2.5	5.4	6.5		3.0		0.8				11.2 × 1	3.125	100-178	177	2.8
EX0301S	3	5.4	6.5		3.0		0.75				11.2 × 1	3.75	100-178	183	2.8
EX0302S	3	4.4	5.3		3.0		0.8				10.0 × 2	3.75	100-178	192	4.7
EX0303S	3	2.2	2.6		1.5		0.75				7.1 × 3	3.75	100-178	146	3.3
EX0502S	5	2.7	3.2		3.0		0.8				11.2 × 2	6.25	100-178	234	5.6
EX07503S	7.5	1.8	2.2		3.0		0.75				11.2 × 3	9.4	100-178	369	8.4
EX1004S	10	2.8	3.4		3.0×2		0.8				11.2 × 4	12.5	150-220	440	11.2
EX1506S	15	1.9	2.3		3.0×2		0.75×2				11.2 × 6	18.75	150-220	400	17
EX2008S	20	1.4	1.7		3.0×2		0.75×2				11.2 × 8	25	150-220	480	22
EX2510S	25	1.1	1.3		3.0×2		0.75×2				11.2 × 10	31.25	150-220	540	28
EX3012S	30	0.9	1.1		3.0×2		0.75×2				11.2 × 12	37.5	150-220	620	33.6
EX3516S	35	0.7	0.8		3.0×2		0.75×2				11.2 × 16	43.75	150-220	700	50

Dimensions (mm)

Type	Capacity (t)	Headroom H	A	B	D	E	I	K	L	N	J	Q	R	T
EX0101S	1	650	600	330	300	176	Φ40	Φ40	31	24	31	/	224	298
EX0102S	1	695	560	300	280	205	Φ40	Φ40	31	24	31	/	224	299
EX01501S	1.5	770	725	350	430	265	Φ49	Φ49	40	30	40	/	224	300
EX0201S	2	770	725	350	430	265	Φ49	Φ49	40	30	40	/	224	301
EX0202S	2	740	600	330	300	236	Φ59	Φ59	42	30	42	/	224	302
EX02501S	2.5	840	725	350	430	265	Φ59	Φ59	42	35	42	/	224	303
EX0301S	3	840	725	350	430	265	Φ59	Φ59	42	35	42	/	224	304
EX0302S	3	920	725	350	430	320	Φ58	Φ59	42	35	42	/	224	305
EX0303S	3	920	600	330	350	205	Φ59	Φ59	45	35	45	/	224	306
EX0502S	5	1015	725	350	430	325	Φ60	Φ60	45	43	45	/	224	307
EX07503S	7.5	1200	725	350	500	320	Φ85	Φ85	80	50	31	/	224	308
EX1004S	10	1200	725	350	890	890	Φ85	Φ85	80	50	80	430	224	309
EX1506S	15	1360	725	350	1030	535	Φ110	Φ110	80	85	70	520	224	310
EX2008S	20	1470	725	350	1220	630	Φ110	Φ110	80	85	70	520	224	311
EX2510S	25	1500	725	350	1450	725	Φ140	Φ140	100	95	80	680	224	312
EX3012S	30	1640	915	458	1500	840	Φ140	Φ140	100	95	90	400	224	313
EX3516S	35	1790	915	458	1600	950	Φ200	Φ200	140	135	100	440	224	314