


(N)RM Electric Chain Hoists (With Hook Suspension)

0.25Ton-5Ton

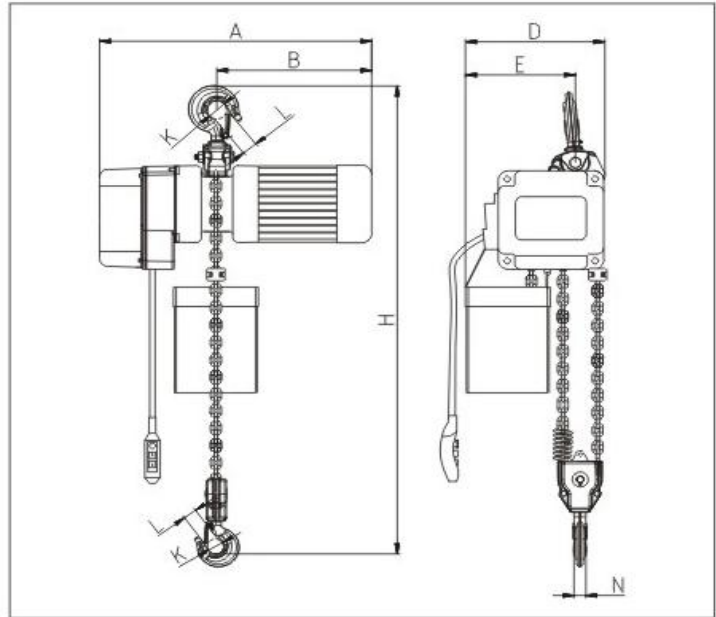

Specifications


Type	Capacity (t)	Lifting Speed (m/min)		Standard Lift (m)	Lifting Motor		Load Chain Diameter (mm) ×chain falls	Test Load (t)	Weight (kg)	Additional Weight per 1m Lift (kg)
		50Hz	60Hz		Power (kw)	Rotation Speed (r/min)				
(N)RM002501S	0.25	9	10.8	3	0.4	1440 (50Hz) 1728 (60Hz)	4.0 × 1	0.313	37	0.4
(N)RM00501S	0.5	7.8	9.4		0.75		6.3 × 1	0.625	47	0.8
(N)RM0101S	1	7.2	8.6		1.5		8.0 × 1	1.25	61	1.1
(N)RM0202S	2	3.6	4.3		1.5		8.0 × 2	2.5	73	2.2
(N)RM0301S	3	5.4	6.5		3.0		11.2 × 1	3.75	122	2.8
(N)RM0502S	5	2.7	3.2		3.0		11.2 × 2	6.25	151	5.6

Dimensions (mm)

Type	Capacity (t)	Headroom	A	B	D	E	I	J	K	L	M	N
		H										
(N)RM002501S	0.25	300	455	210	225	120	Φ31	18	31	18	13	13
(N)RM00501S	0.5	450	565	280	300	195	Φ32	25	32	25	17	17
(N)RM0101S	1	500	595	320	300	176	Φ40	31	40	31	24	24
(N)RM0202S	2	600	595	320	300	245	Φ49	35	30	35	30	30
(N)RM0301S	3	630	785	395	465	295	Φ59	42	Φ59	42	35	35
(N)RM0502S	5	880	785	395	465	360	Φ60	45	Φ60	45	43	43

(N)RM Electric Chain Hoists (With Electric Trolley)

0.25Ton-5Ton

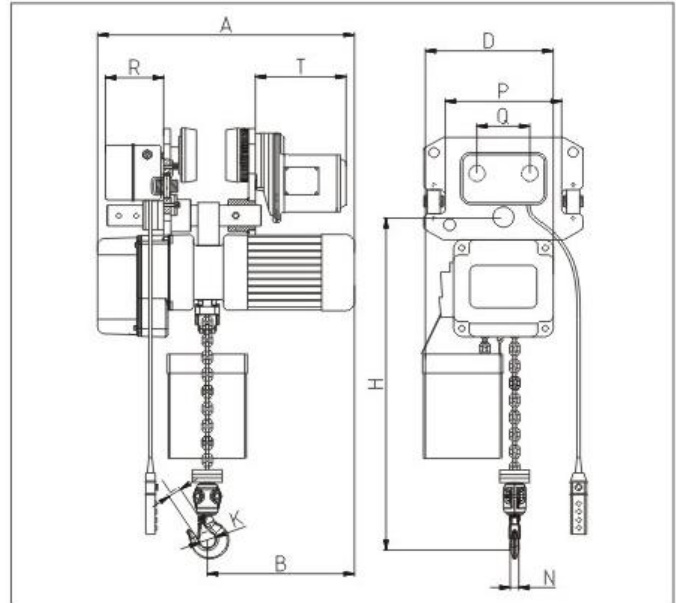


Specifications

Type	Capacity (t)	Lifting Speed (m/min)		Standard Lift (m)	Lifting Motor		Traversing Motor			Load Chain Diameter (mm) ×chain falls	Test Load (t)	I - beam (mm)	Weight (kg)	Additional Weight per 1m Lift (kg)	
		50Hz	60Hz		Power (kw)	Rotation speed (r/min)	Power (kw)	Rotation Speed (r/min)	Traversing Speed (m/min)						
									50Hz	60Hz					
(N)RM002501S	0.25	9	10.8	3	0.4	1440 (50Hz)	0.4	1440 (50Hz)	20	24	4.0 × 1	0.313	58-153	79	0.4
(N)RM00501S	0.5	7.8	9.36		0.75		0.4				6.3 × 1	0.625	80-160	89	0.8
(N)RM0101S	1	7.2	8.6		1.5		0.4				8.0 × 2	1.25	80-160	103	1.1
(N)RM0201S	2	5.4	6.48		1.5		0.4				10.0 × 1	2.5	82-178	164	2.3
(N)RM0202S	2	3.6	4.3		1.5	1728 (60Hz)	0.4	1728 (60Hz)	10	12	8.0 × 2	2.5	82-178	122	2.2
(N)RM0301S	3	5.4	6.48		3	0.4	11.2 × 1	3.75			100-180	183	2.8		
(N)RM0302S	3	2.8	3.4		1.5	0.4	10.0 × 2	3.75	110-180	192	4.7				
(N)RM0502S	5	2.7	3.24		3.0	0.75	11.2 × 2	6.25	110-180	234	5.6				

Dimensions (mm)

Type	Capacity (t)	Headroom	A	B	D	J	K	L	M	N	R	T	P	Q
		H												
(N)RM002501S	0.25	300	455	210	225	18	31	18	13	13	142	231	206	111
(N)RM00501S	0.5	450	565	280	300	25	32	25	17	17	142	231	206	111
(N)RM0101S	1	460	595	320	300	31	40	31	24	24	142	231	206	111
(N)RM0201S	2	560	645	330	320	36	49	35	30	30	142	231	237	127
(N)RM0202S	2	660	595	320	300	35	30	35	30	30	142	231	265	140
(N)RM0301S	3	710	785	395	465	42	Φ59	42	35	35	142	231	265	140
(N)RM0302S	3	680	645	330	320	43	Φ59	42	35	35	142	231	265	140
(N)RM0502S	5	940	785	395	465	45	Φ60	45	43	43	142	231	237	127

(N)RM Electric Chain Hoists (Twin hook)

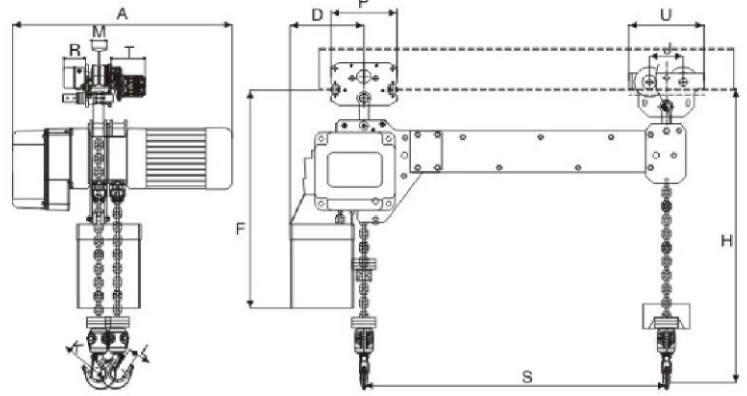0.5Ton-5Ton


Twin hook electric chain hoist, which is equipped with a single motor and two hooks, is intended to lift the hooks horizontally, equally and safety. This product is the most suitable for lifting applications requiring two lifting points for a wide load or retaining a level lifting. For special requirements such as dual speed or curve beam, we can customize.

Specifications


Type	Capacity (t)	Lifting Speed (m/min)		Standard Lift (m)	Lifting Motor		Traversing Motor			Load Chain Diameter (mm) ×chain falls	Test Load (t)	I - beam (mm)	Additional Weight per 1m Lift (kg)	
		50Hz	60Hz		Power (kw)	Rotation speed (r/min)	Power (kw)	Rotation Speed (r/min)	Traversing Speed (m/min)					
					50Hz	60Hz			50Hz	60Hz				
(N)RM00501S	0.25 + 0.25	7.8	9.36	3	0.75	1440 (50Hz) 1728 (60Hz)	0.4	1440 (50Hz) 1728 (60Hz)	20	24	6.3 × 1	0.625 × 2	80-160	0.8
(N)RM0101S	0.5 + 0.5	7.2	8.6		1.5		0.4				10	12	8.0 × 2	1.25 × 2
(N)RM0201S	1 + 1	5.4	6.48		1.5		0.4				10.0 × 1	2.5 × 2	82-178	2.3
(N)RM0301S	1.5 + 1.5	5.4	6.5		3.0		0.4				11.2 × 1	3.75 × 2	100-180	2.8
(N)RM0502S	2.5 + 2.5	2.7	3.24		3.0		0.75				11.2 × 2	6.25 × 2	110-180	5.6

Dimensions (mm)

Type	Capacity (t)	Headroom	A	B	D	P	U	S	K	L	R	T	N
		H											
(N)RM00501S	0.5	450	660	320	200	206	111	3000	Φ32	25	142	231	17
(N)RM0101S	1	550	660	350	200	206	111	3000	Φ40	31	142	231	17
(N)RM0201S	2	550	780	440	260	206	111	3000	Φ40	31	142	231	24
(N)RM0301S	3	650	870	310	300	265	140	3000	Φ59	42	142	231	35
(N)RM0502S	5	850	870	310	300	296	156	3000	Φ60	45	142	231	43

(N)RM Electric Chain Hoists (Upside-down/theatrical/stage type)

1Ton

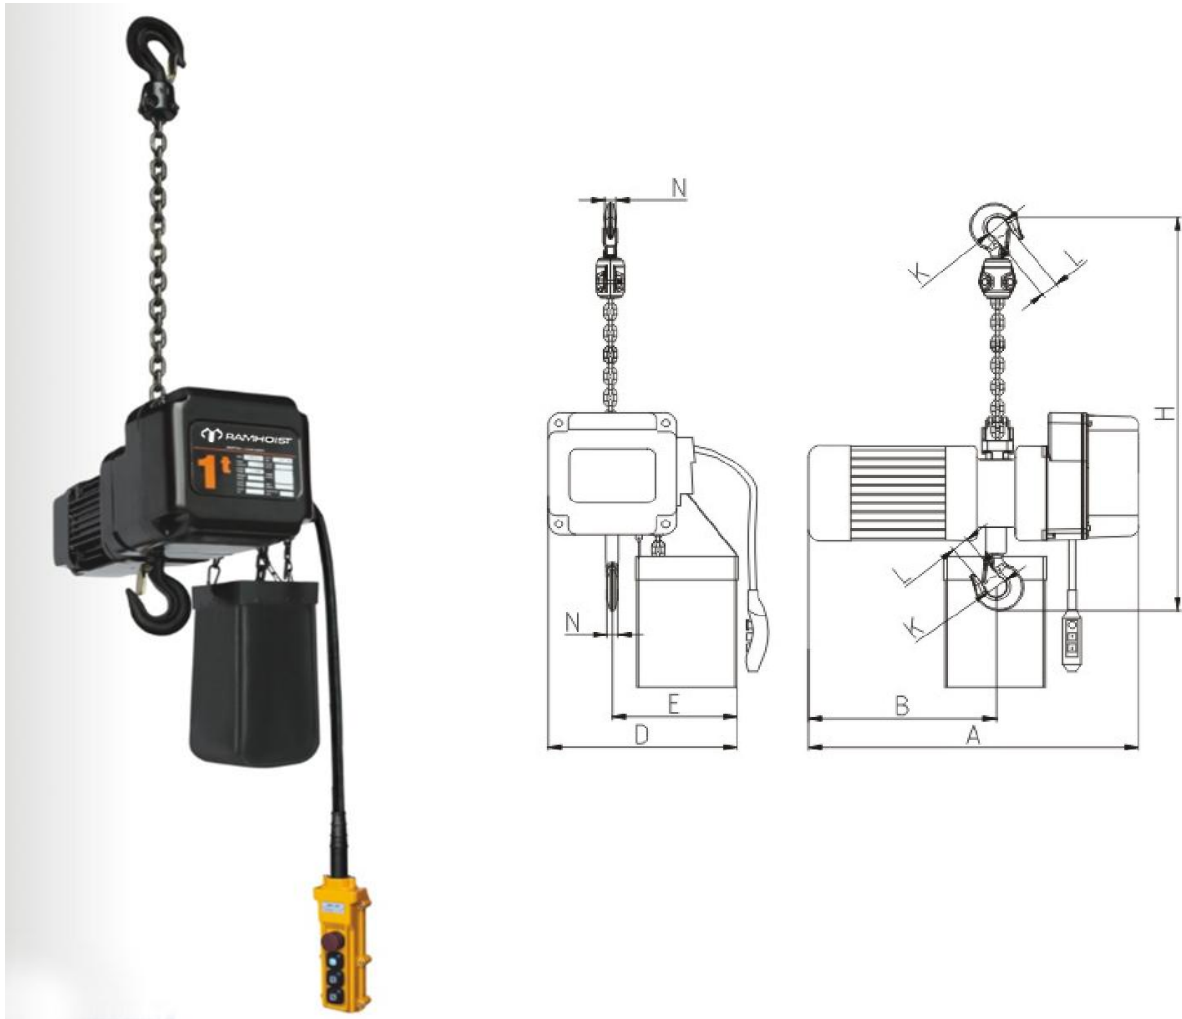

Specifications

Type	Capacity (t)	Lifting Speed (m/min)		Standard Lift (m)	Lifting Motor		Load Chain Diameter (mm) ×chain falls	Test Load (t)	Weight (kg)	Additional Weight per 1m Lift (kg)
		50Hz	60Hz		Power (kw)	Rotation Speed (r/min)				
(N)TNRM101S	1	7.2	8.6	3	1.5	1440	8.0 × 1	1.25	61	1.1

Dimensions (mm)

Type	Capacity (t)	Headroom	A	B	D	E	K	L	N
		H							
(N)TNRM101S	1	400	595	320	300	230	Φ40	31	24