


Jib Cranes

5Ton-50Ton

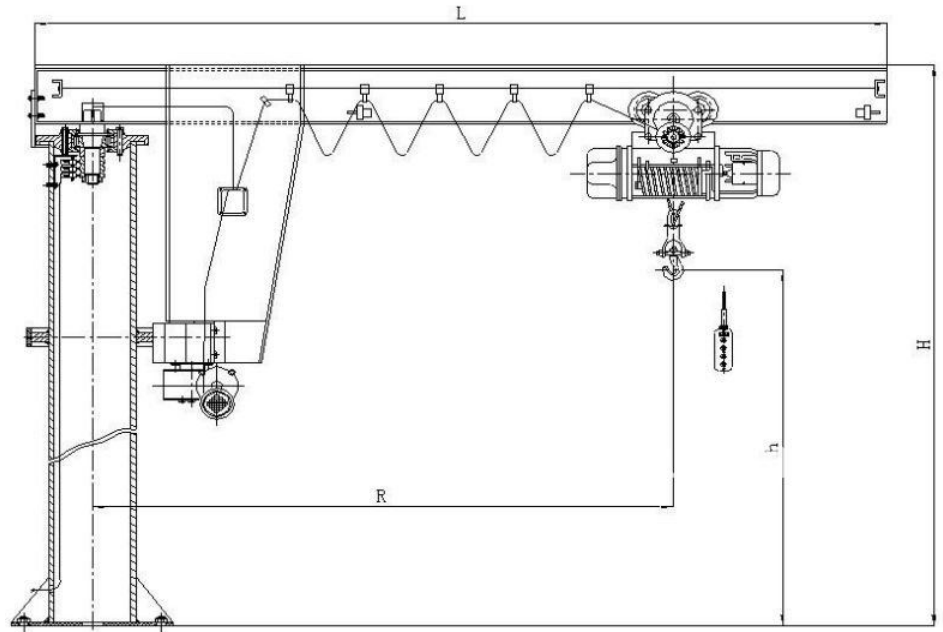

Specifications

Lift Capacity (t)	0.25	0.50	1	2	3	5	8	10
Span (m)	3-16							
Lifting Height(m)	3-30							
Arm length (m)	1.2-20							
angle of revolution (°)	180/270/360							
Lifting Speed (m/min)	Normal	4;10;8	5;10;8	8	8	8	8	8
	Slow	1;2.5;0.8	1.25;2.5	1	1	1	1	1
lifting motor								
Travelling Speed (m/min)	20: (30)							
Slewing Speed (r/min)	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6
Beam Material	H Beam & KBK Beam							
Work duty	middle grade, JC=25%							
Wheel diameter (mm)	130				150			
Rail surface width (mm)	37-70							
Beam Material	H Beam & KBK Beam							
Max. Turning radius(m)	5-12							
Min. Turning radius(m)	1.5				1.7			
Rail	p18,p22,p24,p30							
hoist	wire rope electric hoist, chain electric hoist or Manual hoist							
Power supply	220-440V,50/60HZ,3phase or customized							
Control mode	Pendent pushbutton control or remote control							
Above parameter just for your reference,jib crane can be customized design Max.20t according to your demands.								