


The image features a technical line drawing of a crane hook, rendered in white lines against a semi-transparent reddish-brown background. The drawing shows the hook's profile, including the throat, the hook body, and the shank. The text "ASBESTOS-FREE" is printed in a bold, black, sans-serif font across the middle of the hook's body. The background also contains faint, overlapping technical drawings of other crane components, such as a pulley and a hook shank, which are slightly blurred and less distinct than the main hook drawing.

**ASBESTOS-FREE**


# HOIST



500kg to 1.5t

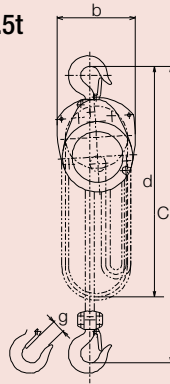

2t to 3t

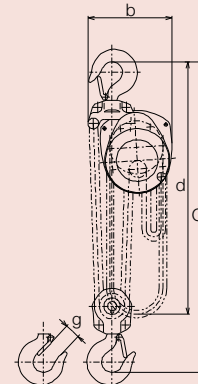

Model	Code	Capacity (t)	Std. Lift (m)	Min. Headroom (mm)	Chain Pull to Lift Full Load (N (kgf))	Chain O'hauled to Lift Load One Meter (m)	Load Chain Dia. x Chain Fall (mm)	Test Load (t)	Mass (Net Weight) (kg)	Shipping Mass (Weight) (Approx.) (kg)	Mass (Weight) for Additional One Meter of Lift (kg)	b (mm)	d (m)	g (mm)
CF4	CF005	0.5	2.5	325	294 (30)	19	5.0 x 1	0.75	10	11	1.5	150	2.5	27
CF4	CF010	1	2.5	370	353 (36)	31	6.3 x 1	1.5	12	13	1.8	174	2.5	29
CF4	CF015	1.5	2.5	440	412 (42)	41	7.1 x 1	2.4	17	18	2.1	203	2.5	34
CF4	CF020	2	3.0	510	392 (40)	63	6.3 x 2	3	21	22	2.7	204	3.0	36
CD4	CF030	3	3.0	590	451 (46)	81	7.1 x 2	4.8	28	30	3.2	240	3.0	42.5

Any lift of chains are available on request. KITO chains are heat-treated. NEVER attempt to lengthen the load chain by welding. The chain must be replaced with a new one of desired length. When ordering, specify the lifting height.

## KITO TF Series Universal Trolley Model TF2

Economical Type



500kg to 3t Capacity



Plain Type

Geared Type

5t Capacity



Plain Type

Geared Type

- Life Time Lubricated Ball Bearing Equipped
- Adjustable for Both Tapered and Flat Flanged
- Load Equalization and Smooth Operation with Pivot Mounted Trolley Frames
- Extremely Small Min. Radius for Curve (500kg to 3t Capacity)

Model	Code		Capacity (t)	Beam Width Adjustability (mm)			Min. Radius for Curve (mm)	Mass (Net Weight) (kg)		Hand Chain Folded Length (m)
	Plain Trolley	Geared Trolley		Standard	Option			TFP	TFG	
					W20*	W30*				
TF2	TFP005	—	0.5	50 to 102	102 to 203	203 to 305	350	4.0	—	—
TF2	TFP010	TFG010	1	58 to 127	127 to 203	203 to 305	450	7.0	11	2.5
TF2	TFP015	TFG015	1.5	82 to 153	—	153 to 305	550	13	17	2.5
TF2	TFP020	TFG020	2	82 to 153	—	153 to 305	550	13	17	3.0
TF2	TFP030	TFG030	3	82 to 153	—	153 to 305	650	21	25	3.0
TF2	TFP050	TFG050	5	125 to 178	—	178 to 305	2000	43	47	3.5

\*W20 and W30 mean 203 and 305mm beam width adjustability as option.

In case of only straight I-beam, 500kg plain trolley can be used on 58mm and less width beam, and 1 t plain trolley and geared trolley can be used on 74mm and less width beam.

Specifications and dimensions are subject to change without notice.



Tokyo Opera City Tower 16th Floor,  
3-20-2 Nishi-Shinjuku, Shinjuku-ku, Tokyo 163-1416, JAPAN  
TEL: +81-3-5371-7315 FAX: +81-3-5371-7349  
E-mail: overseas@kito.co.jp  
URL: http://www.kito.co.jp

Distributed by:



Printed in Japan 18.11(A)HC03-05